


TUBIS BL

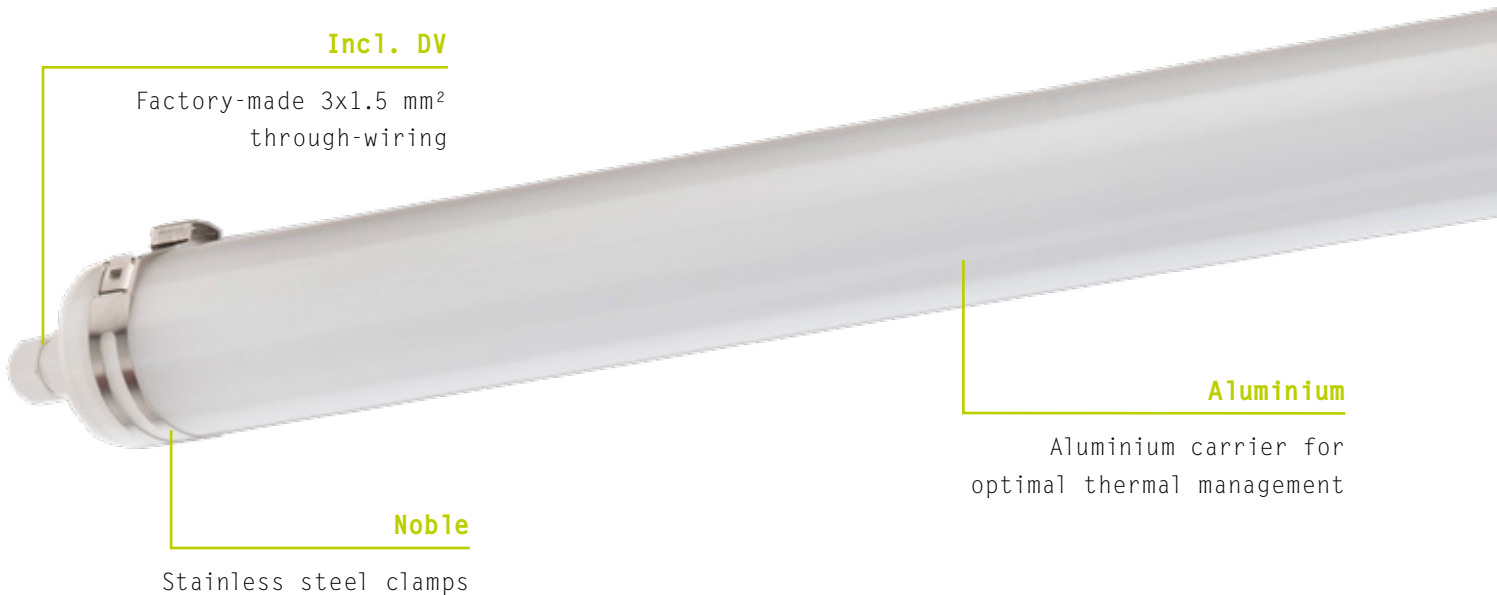

Incl. DV

Factory-made 3x1.5 mm²
through-wiring

Noble

Stainless steel clamps

Aluminium

Aluminium carrier for
optimal thermal management

HOUSING PMMA-Blend round tube.

END CAPS PBT end caps.

SEALS Extremely short, age-resistant silicone seals.

ELECTRICAL COMPONENTS High power LED, LED converter.

ASSEMBLY Variable mounting distances by PRACHT-CLAMP-SYSTEM. Suitable for ceiling, wall, pendant and rail mounting.

FIELDS OF APPLICATION Washing plants, wet rooms, workshops, unprotected outdoor areas, agriculture (unlimited), acid and alkaline cleaning, plants and oily environments.

Individual luminaire, color temperature 4000 K, Ra>80, diameter 70mm

Power	Light distribution	Luminous flux	P/N	Length	Weight
1x24 W	135° wide	2800 lm	5240004	1310 mm	1,8 kg
1x45 W	135° wide	5400 lm	5240014	1310 mm	1,8 kg
1x32 W	135° wide	3800 lm	5240005	1610 mm	2,2 kg
1x54 W	135° wide	6500 lm	5240015	1610 mm	2,2 kg




Protection class I according to EN 60598
Protection type IP67/IP69K

AC/DC 220-240 V 50/60 Hz *registered

Fast

Solid PBT end caps,
extremely fast connection

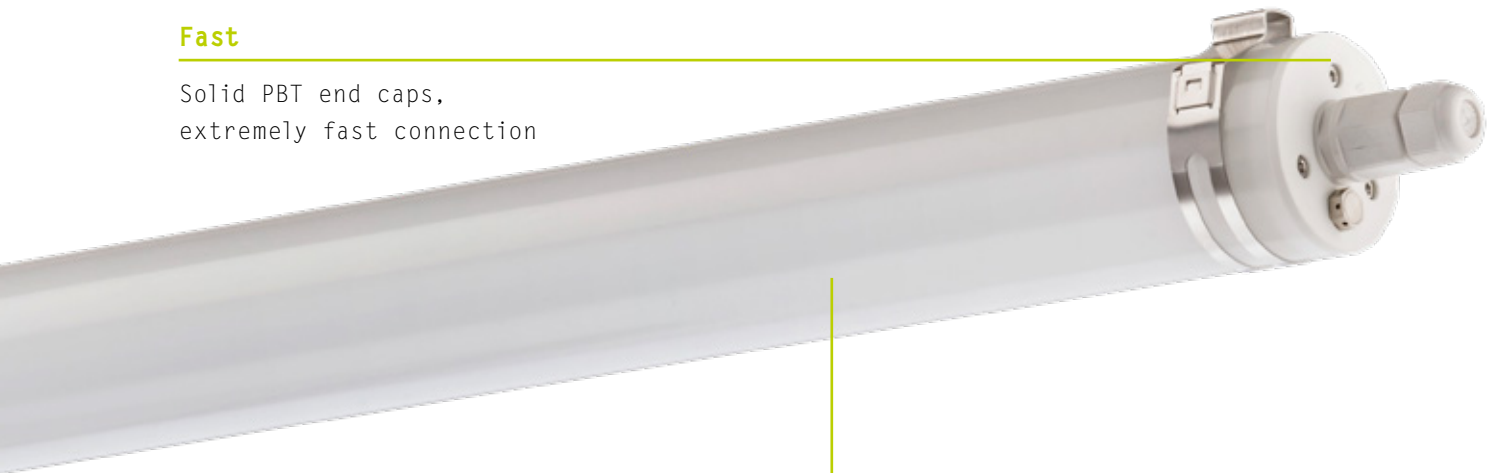

Resistant

High-quality PMMA-blend
round tube (IK06, Ø70mm)



SPECIALIST

**ACID-ALKALI-RESISTANT
OIL-RESISTANT AGRICULTURE
STURDY FAST ASSEMBLY ENEC
FOR UNPROTECTED OUTDOOR AREAS
TUBULAR LUMINAIRE -20° C ... +40° C**



3
YEAR
WARRANTY



50.000 h
LIFETIME



A++



INCL. DV
(3X1,5MM²)



**UNRESTRICTED
LIVESTOCK
FARMING**



-20° C ... +40° C



**UNPROTECTED
OUTDOOR AREA**

PRACHT.COM

+49 64 66 / 91 40-0